


P-INOXN / P-INOXN-S5

STAINLESS STEEL PLATFORM - 4 LOAD CELLS IP68

LAUMAS®



Capacity up to 3000 kg

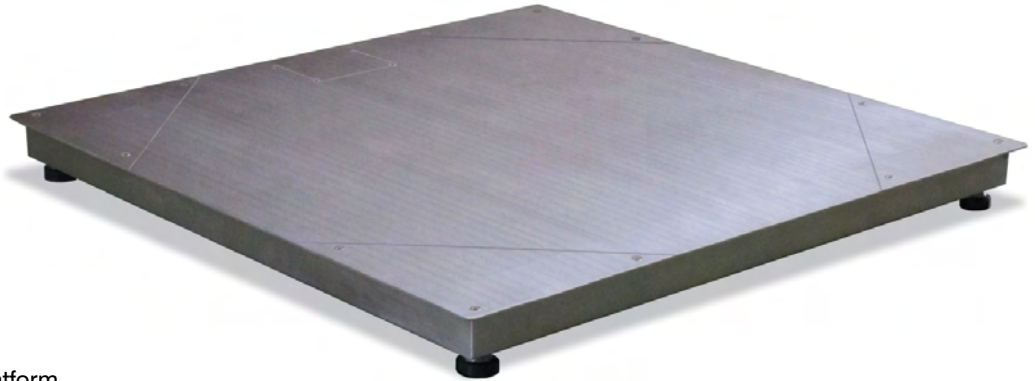

- AISI 304 stainless steel platform.
- **P-INOXN**: 4 load cells FT-P 1000 kg
P-INOXN-S5: 4 load cells FT-P 500 kg
17-4 PH stainless steel - IP68 (on request: IP69K).
- IP67 stainless steel junction box with equalization board and 6-wire output cable (length: 5 m).
- Inspectable compartments for load cells and junction box.
- AISI 304 stainless steel adjustable feet, self-centering on sphere.
- Two M12 holes for lifting eyebolts.



CAPACITY	kg	ACCURACY CLASS C3	IECEx Ex	DIMENSION (mm)	WEIGHT (kg)	CODE
1500		•	•	1250 x 1250	117	P1250INOXNS5
1500		•	•	1500 x 1500	156	P1500INOXNS5
3000		•	•	1250 x 1250	117	P1250INOXN
3000		•	•	1500 x 1500	156	P1500INOXN

□
ON REQUEST

CERTIFICATIONS



OIML R60 C3



Equivalent of the CE marking for the United Kingdom

CERTIFICATIONS ON REQUEST



IP69K

Declaration of conformity + IP69K marking protection rating

Water protection in case of high-pressure or steam jet cleaning (test: pressurized water is sprayed from a distance of max 150 mm)
Water pressure: 100 bar; temperature: 80 °C; test duration: 250 seconds (reference standard: DIN 40050-9)



ATEX II 2GD (zone 1-2-21-22)




IECEx (zone 1-2-21-22)

P-INOXN / P-INOXN-S5

STAINLESS STEEL PLATFORM - 4 LOAD CELLS IP68

LAUMAS®

DIMENSIONS (mm)

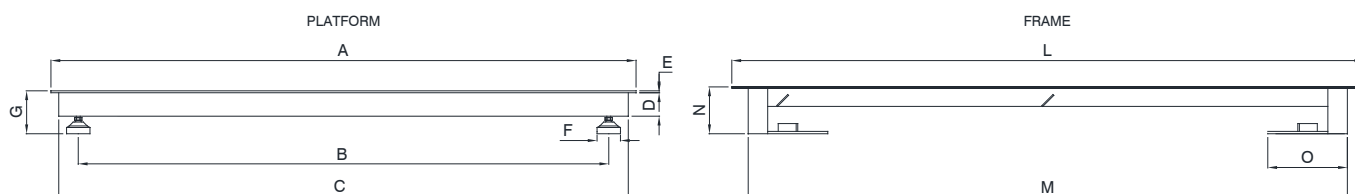


PLATFORM

Code	Load cells capacities	Code	Load cells capacities	A	B	C	D	E	F	G
P1250INOXNS5	500 kg	P1250INOXN	1000 kg	1250 x 1250	1112	1210	60	4	60	90 ± 105
P1500INOXNS5	500 kg	P1500INOXN	1000 kg	1500 x 1500	1362	1460	60	4	60	90 ± 105






FRAME

Code	L	M	N	O	Gross weight
TELP1250INOXN	1366 x 1366	1272 x 1272	110	200	30 kg
TELP1500INOXN	1616 x 1616	1522 x 1522	110	200	36 kg

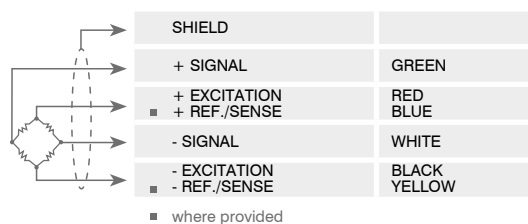ELECTRICAL CONNECTIONS



OPTIONS ON REQUEST

DESCRIPTION	CODE
 <p>AISI 304 stainless steel pit frame with centering plates. For platforms: 1250x1250 mm 1500x1500 mm</p>	<p>TELP1250INOXN TELP1500INOXN</p>
 <p>Stainless steel access ramp. Dimensions: 1250x1060x110 mm</p>	P1250INOXRAMP
 <p>Stainless steel indicator-holder column (Ø38 mm, height 700 mm). Stainless steel bracket for floor mounting.</p>	COLONNAM + STAFFAIN
 <p>AISI 304 stainless steel constraint against lateral displacement and overturning (1 piece).</p>	PPV
 <p>Non-standard capabilities.</p>	

The Company reserves the right to make changes to the technical data, drawings and images without notice.